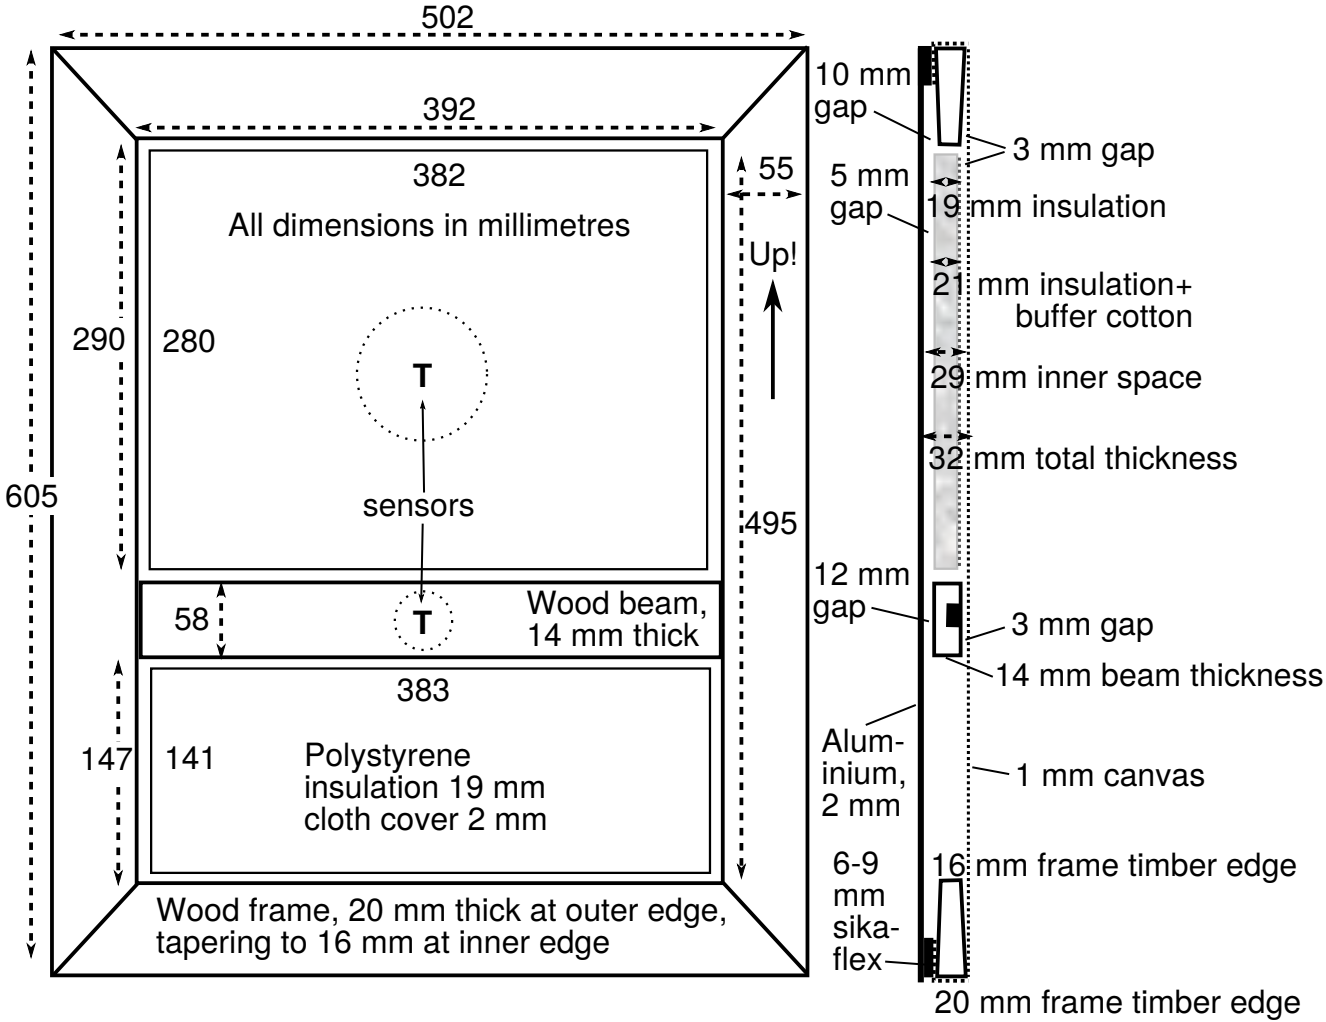
502
392
382
All dimensions in millimetres
55
Up!
290
280
T
605
sensors
495
58
T
Wood beam,
14 mm thick
383
147
141
Polystyrene
insulation 19 mm
cloth cover 2 mm
Wood frame, 20 mm thick at outer edge,
tapering to 16 mm at inner edge
10 mm
gap
3 mm gap
5 mm
gap
19 mm insulation
21 mm insulation+
buffer cotton
29 mm inner space
32 mm total thickness
12 mm
gap
3 mm gap
14 mm beam thickness
Alum-
inium,
2 mm
1 mm canvas
6-9
mm
sika-
flex
16 mm frame timber edge
20 mm frame timber edge